广州金恒源电子科技有限公司

GUANGZHOU JINHENGYUAN ELECTRONIC TECHNOLOGY CO.,LTD

TSD

电性能 /Characteristics	规格 /Standard
条件/放电电流 温度 截止电压/工作温度范围 Current/Temp /Stop Voltage/Working Temp	标称容量 /Capacity
800mA /150℃/ 2.0V / -40℃-150℃	45AH
公称电压/Voltage	3.65V
最大持续放电电流/Maximum Current	800mA
最大脉冲放电电流/Pulse Maximum Current	3000mA

规格尺寸、质量/Size & Weight

电池直径（最大）/Diameter Max	53mm
电池高度（最大）/Height Max	96mm
电池质量/Weight	

贮存/Storage

应在清洁、干燥、凉爽（小于等于25℃）条件下放置
Store cells in a cool(below 25℃) and dry condition

长贮存寿命（25℃时年自放电率2%）
(Low self discharge rate 2% per year at 25° C)

警告/Warning

请勿充电、撞击、挤压、短路或者加热，否则可能引起爆炸、燃烧和有害物质泄漏
Strictly Prohibited Operations. Any short-circuiting, charging, disassembling, crushing, or incineration of the product is strictly prohibited.

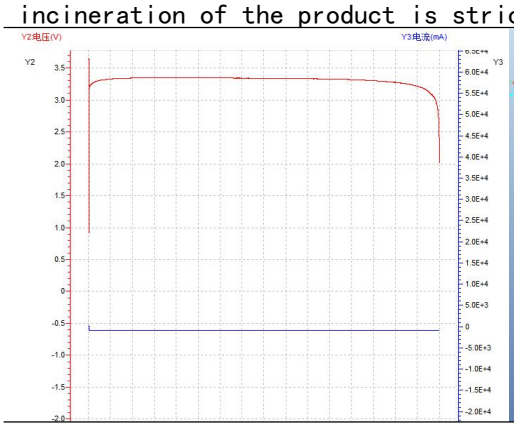

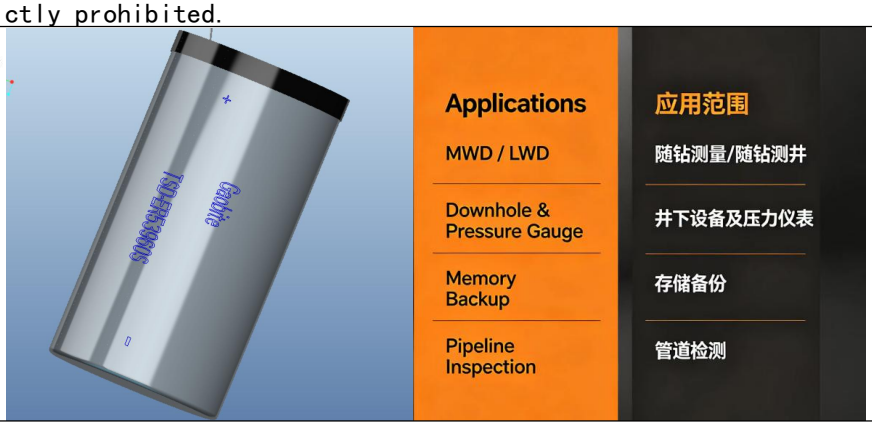

广州市金恒源电子科技有限公司
地址:广州市自云区良田南横一路7号
电话:020-31523045
网址:http://www.gaobitebattery.com

GUANG ZHOU JIN HENG YUAN CO.,LTD
Add: 7, Liangtian Nanheng Yi Rd, Baiyun Dist, Guangzhou
Tel: 020-31523045
Website: http://www.gaobitebattery.com

注：文中数据仅供参考，不作电池性能的担保，正式产品质量于购货合同中由供需双方确认。

Note: The data provided herein is for reference only and does not guarantee battery performance. Formal product quality shall be confirmed between suppliers and customers in the purchase contract.